22023.03.22 Ver.3



# Patient Transfer System



# Instruction for use

EZ-150P Patient Transfer Slide

## Important:

Read these instructions carefully before using the EZ-150P Patient Transfer Slide.

### Manufacturer

EZ-Care Solution, Co., Ltd. 12F, No. 171, Sec. 4, Nanjing E. Rd., Songshan Dist., Taipei City 105, Taiwan TEL: +886-2-2659-2277; FAX:+886-2-2798-8321; E-mail: sales@ezcaresolution.com www.ezcaresolution.com

All of the aids produced by EZ-Care Solution Co., Ltd fulfill the following norms for the medical products Class 1 (MDR (EU) 2017/145).

Explanation of symbols in Instruction for use and on labels				
REF	Model Number	$\triangle$	Warning	
LOT	Lot No.	MAX LOAD	Maximum load	
i	Read the user manual		Manufacturer	
$\otimes$	No sharps	EC REP	European Representative	
$\bigotimes$	Do not bleach	MD	Medical device	
X	Do not iron	Œ	CE-marking	
En	Manual Cleaning	UDI	Unique Device Identification	
×	Keep out of the sun			

## **Product Label**



## Contents

1.	Introduction	5
	1.1 Intended Use	5
	1.2 Intended Environment	5
	1.3 Safety	5
	1.4 Warranty	6
	1.5 Product Structure	6
	1.6 Product Specification	6
2.	Operation	7
2		•
3.	Cleaning Instruction	8
Δ	Maintenance	8

## 1. Introduction

#### 1.1 Intended Use

EZ-150P is a lightweight, foldable, patient transfer device that helps move a patient from one flat surface to another, such as from a bed to an x-ray/MRI table, operating table, shower trolley, or ambulance stretcher.

#### **1.2 Intended Environment**

Acute Care, Long-term Care, Home Care

#### 1.3 Safety



A failure to comply with the following safety points and further definitions in these instructions for use could lead to dangerous situations. Please read carefully.



Please consult with the patient's care team in advance to ensure the product can be used, and in combination with other devices, that is safe for the patient and the caregivers.



Always complete a patient risk assessment prior to all patient-handling activities.



It's important that caregivers receive manual handling training in advance.



There is a risk that the patient may slide off. Never leave the patient alone on the edge of the bed.



Never leave the product on the floor.



The maximum load of EZ-150P is 200 Kg.




The maximum safety gap is 15cm between the transfer surfaces; however, it is strongly recommended that two surfaces are leveled and as close as possible.



Ensure the transfer surfaces are securely locked.

#### 1.4 Warranty

All EZ-GO products are supplied with a 1-year warranty, on construction and/or material faults unless otherwise stated. In the event of varying warranty terms, the warranty starts from the invoice date. The warranty does not cover failures and damage not caused by the product's defects such as improper cleaning.

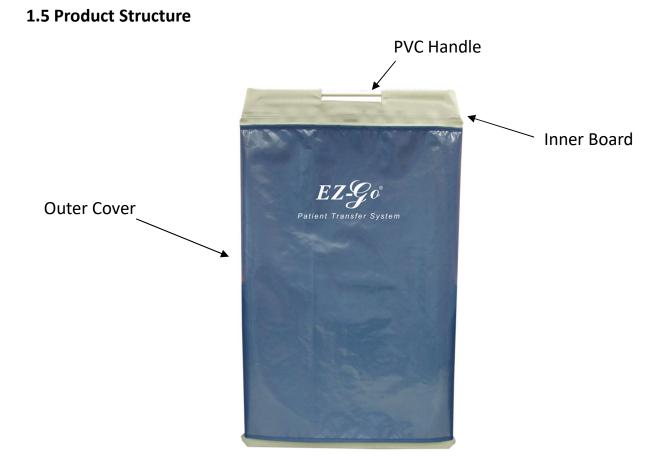

#### **1.6 Product Specifications**


Size: 89 x 55 cm (±3%) (folded) Weight: 1.1 Kg (±3%) Material: Textile: Nylon Handle: PVC Inner Board: EVA Lifetime: under normal storage and use condition, 3 years.

## 2. Operation

- Unfold EZ-150 and push it adjacent to the patient.
- Lean the patient to one side and roll EZ-150 underneath the patient.
- Lay the patient on the slide.



• Gently push the patient's shoulder and hip so EZ-150 can easily roll across the transfer surfaces. Ensure the patient is fully transferred to the other device.

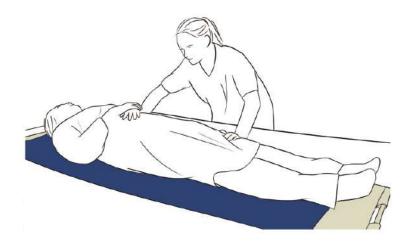

• Lean the patient to the other side and roll out EZ-150. Remove the slide.



### 3. Cleaning Instruction

- Hand clean with water and regular household cleaning agents.
- Use 70% ethanol to disinfect the product if necessary.
- Do not iron.
- Do not high-temperature sterilization.



### 4. Maintenance

- 5. Store at room temperature and keep out of the sun.
- 6. EZ-150 must be checked periodically.
  - ✓ Visual Check: Ensure the materials, seams, and stitching are intact/faultless.